Firmware & Presets


Recalling S10n Beta Presets

1. Open Lake™ Controller 6.5 or higher and select your active network adapter. Place all online frames you wish to load in your workspace area.

2. Choose Modules then Module Store/Recall and navigate to folder containing Load Library files and locate the correct module presets and load the applicable preset to your frame.



3. The first module of the PLM should have the LF preset loaded, and the second module, the HF preset loaded. Each time you load a preset, you will be prompted to assign channel routing. The following is how channels are routed for the S10n beta preset.

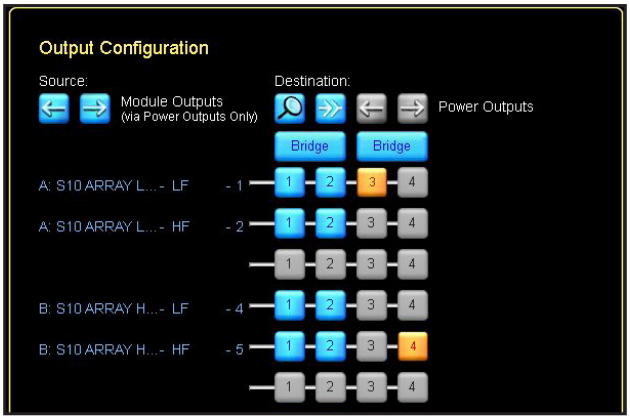

S10n Beta Routing